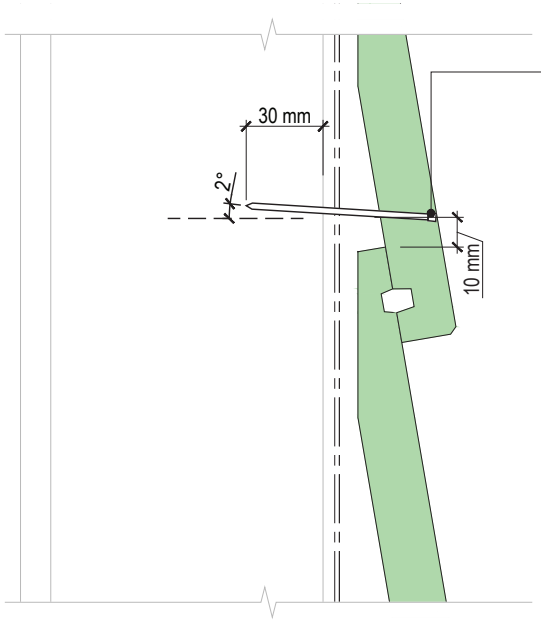

Hume Pine Bevelback Weatherboards to be fixed with:
For Pineclad systems
- ECKO Jolt Head Screws T-Rex17® 8G x 75 mm S/Steel or galvanised
- Hand driven nails - 75 mm x 3.15 mm hot dipped glavanised nails (smooth) or s/steel (annular grooved)

For TMT systems
- ECKO Jolt Head Screws T-Rex17® 8G x 75 or 90 mm S/Steel, or
- Rose head nails - 75 or 90 mm x 3.15 mm s/steel (annular grooved)

Fixings
- 3 - 5 mm gap between boards
- single mid-fixed board to each nog, nogs at max 800 crs
- fixings to be min 40 mm from end of board
- fixings at a 2º angle
- ensure cut ends of all boards are coated before fixing

Hume Pine
Bevelback Weatherboard Fixing to Timber Framing

Version V2.1
Scale 1:2.5
Date: 8/9/2022
Ref: HPDBBH-C1

HUME PINE

CodeMark
CMNZ30105